

Standard Features

- Electronic coffee machine or semi-automatic with electromechanical push buttons.
- Two versions complete the adaptability of this unit. PR with a built-in rotary pump for water mains connection, and PV with a built-in vibrating pump.
- Four programmable brew options (EVD), and manual brewing button (EPU).
- One polished stainless-steel steam wand, and hot water outlet operated by sprung push button.



Heating Element	1,200 watt
Boiler	2 ltr
Net Weight	55 lbs
Approx. Ship Weight	61 lbs
Measurements	13.19"W x 19.91"D x 16.73"H
Power	120 volt/10 amps




Nema L5-30

Water Requirements

- 3/8" dedicated cold water line with shut off valve and compression fitting.
- Water hardness cannot exceed 3gpg or 50ppm.
- Water softener must be installed if it exceeds the limits.
- Minimum incoming water flow rate of 35 GPH and the maximum line pressure of 70 PSI/5 BAR

Drain Requirements

Open gravity drain of minimum 1.25 inch within 4 feet of the machine

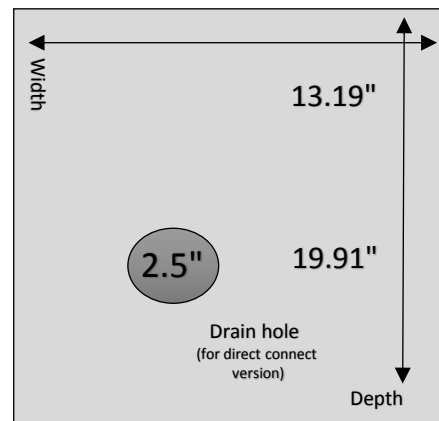

*Updates made 5/2018