



Polaris Fact Sheet

Standard Features

- Four programmable doses per group, with manual brewing button
- Two stainless steel steam wands with slide lever control tap.
- Auto level and built in volumetric pump.
- Automatic group washing cycle.
- Side panels with LED white lights as standard, (RGB optional)




Additional Cost Features

- Raised Group
- Auto Steam
- Chrome Panels
- RGB Color lighted panels



Color Options:




	EVD 1 ●	EVD/EPU 2 ●	EVD/EPU 3 ●
Heating Element	3,000 watt	3,700 watt	5,300 watt
Boiler	5 Ltr	12 Ltr	17 Ltr
Net Weight	150 lbs	163 lbs	202 lbs
Approx Ship Weight	170 lbs	185 lbs	229 lbs
Measurements	21.26" W x 22.44" D x 21.26"H	29.53"W x 22.44"D x 21.26"H	38.98"W x 22.44"D x 21.26"H
Power	110 volt/27.2 amps 220 volt/13.6 amps	220 volt/16.8 amps	220 volt/24 amps
	 Nema L5-30 Nema L6-30	 Nema L6-30	 Nema L6-30

Water Requirements

- 3/8" dedicated cold water line with shut off valve and compression fitting.
- Water hardness cannot exceed 3gpg or 50ppm.
- Water softener must be installed if it exceeds the limits.
- Minimum incoming water flow rate of 35 GPH and the maximum line pressure of 70 PSI/5 BAR

Drain Requirements

Open gravity drain of minimum 1.25 inch within 4 feet of the machine

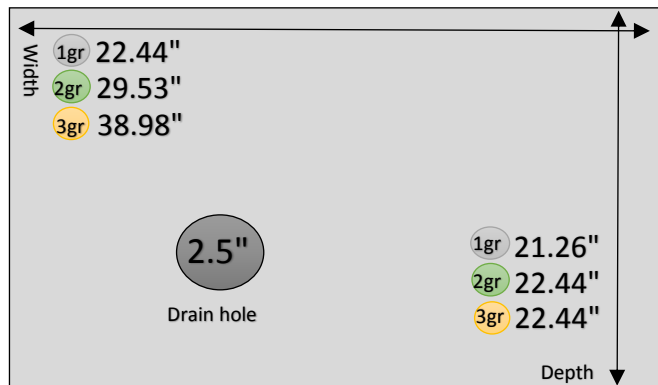

*Updates made 5/2018