

Standard Features

- Multiple Boiler Technology
- Individual Group Boilers
- Low Energy Consumption
- Certified Green
- High Safety Boiler
- Lever Operated Steam Wand



Color Options



	EVD 2 ●	EVD 3 ●
Heating Element	4,400 watt	5,600 watt
Steam Boiler Power	3,000 watt	3,000 watt
Group Boiler Element	1,000 watt x 2	1,000 watt x 3
Boiler	8 ltr	8 ltr
Net Weight	209 lbs	258 lbs
Approx Ship Weight	231 lbs	284 lbs
Measurements	27.56" W 22.04" D 22.80"H	37"W x 22.04"D x 22.80"H
Power	220 volt/ 20 amps	220 volt/ 25.5 amps



Nema L6-30




Nema L6-30

Water Requirements

- 3/8" dedicated cold water line with shut off valve and compression fitting.
- Water hardness cannot exceed 3gpg or 50ppm.
- Water softener must be installed if it exceeds the limits.
- Minimum incoming water flow rate of 35 GPH and the maximum line pressure of 70 PSI/5 BAR

Drain Requirements

Open gravity drain of minimum 1.25 inch within 4 feet of the machine

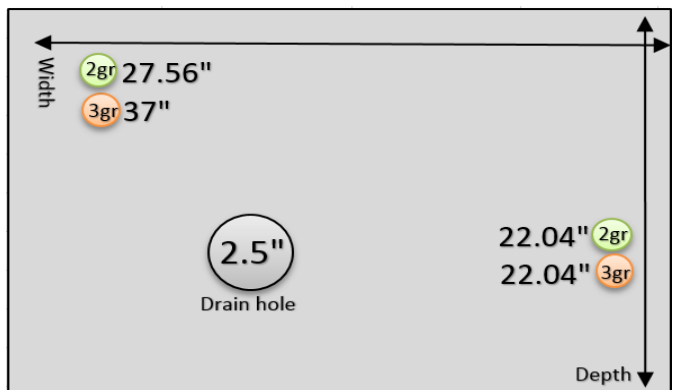

*Updates made 5/2018