



Polaris Compact Fact Sheet

Standard Features

- Four programmable doses per group, with manual brewing button.
- Two stainless steel steam wands with slide lever control tap.
- Built in motor pump
- Compact for small area, 2 groups built into 1 group chassis.
- Side panels with LED white lights as standard.



Additional Cost Features

- Raised Groups



Color Options:




	EVD/2 110 VOLT ●	EVD/2 220 VOLT ●
Heating Element	2,900 watt	2900 watt
Boller	7 ltr	7 ltr
Net Weight	161 lbs	161 lbs
Approx Ship Weight	181 lbs	181 lbs
Measurements	W21.26" D22.44" H21.26"	W21.26" D22.44" H21.26"
Power	110 volt/26.4 amps	220 volt/13.2 amps
	 Nema L5-30	 Nema L6-30

Water Requirements

- 3/8" dedicated cold water line with shut off valve and compression fitting.
- Water hardness cannot exceed 3gpg or 50ppm.
- Water softener must be installed if it exceeds the limits.
- Minimum incoming water flow rate of 35 GPH and the maximum line pressure of 70 PSI/5 BAR

Drain Requirements

Open gravity drain of minimum 1.25 inch within 4 feet of the machine

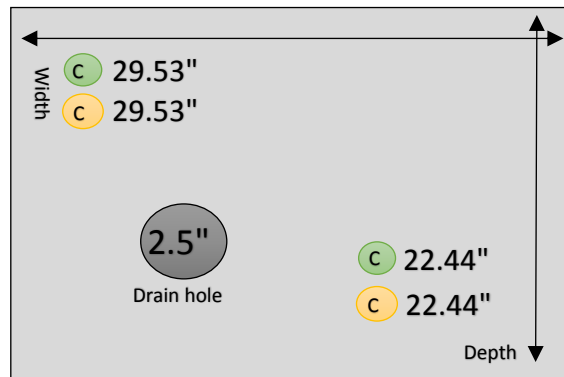

**Updates made 5/2018*