



IO Fact Sheet

Standard Features

- Built in microprocessor controlling all operations and providing volumetric dosages for coffee brewing.
- Four programmable doses per group, with manual brewing button.
- Two stainless steel steam wands and one manual hot water tap.
- Automatic water re-fill and built in volumetric pump as standard.

Barista Down lights

Raised groups



Color Options:

PEARLY WHITE

EVD 2



Heating Element	3,900 watt
Boiler	10.5 ltr
Net Weight	140 lbs
Approx Ship Weight	200 lbs
Measurements	29.33"W x 20.67"D x 20.12"H
Power	220 volt/16.8 amps




Nema L6-30

Water Requirements

- 3/8" dedicated cold water line with shut off valve and compression fitting.
- Water hardness cannot exceed 3gpg or 50ppm.
- Water softener must be installed if it exceeds the limits.
- Minimum incoming water flow rate of 35 GPH and the maximum line pressure of 70 PSI/5 BAR

Drain Requirements

Open gravity drain of minimum 1.25 inch within 4 feet of the machine

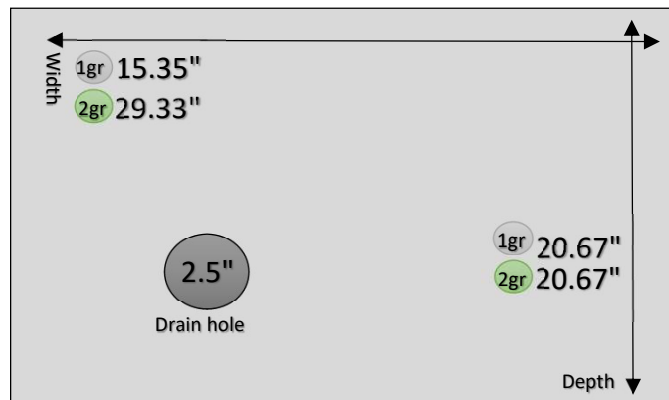

*Updates made 8/2018